
SZCJ Shenzhen Changji Semiconductor Co., LTD.

SOT-23-3L Plastic-Encapsulate MOSFETS

CJK3401AH P-Channel Enhancement Mode Field Effect Transistor

$V_{(BR)DSS}$	$R_{DS(on)}$MAX	I_D
-30V	50 mΩ@-10V	-4.2A
	60 mΩ@-4.5V	
	85 mΩ@-2.5V	

SOT-23-3L



1. GATE
2. SOURCE
3. DRAIN


FEATURE

- High dense cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability


APPLICATION

- Load Switch for Portable Devices
- DC/DC Converter

MARKING



Equivalent Circuit



Maximum ratings (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	±12	V
Continuous Drain Current	I_D	-4.2	A
Drain Current-Pulsed (note 1)	I_{DM}	-27	A
Power Dissipation(note 2)	P_D	1.4	W
Thermal Resistance from Junction to Ambient (note 2)	$R_{\theta JA}$	89	℃/W
Operation Junction and Storage Temperature Range	T_J,T_{STG}	-55~+150	℃

MOSFET ELECTRICAL CHARACTERISTICS

T_a=25℃ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D =-250μA	-30			V
Zero gate voltage drain current	I_{DSS}	V_{DS} =-24V,V_{GS} = 0V			-1	μA
Gate-source leakage current	I_{GSS}	V_{GS} =±12V, V_{DS} = 0V			±100	nA
On characteristics						
Drain-source on-resistance (note 1)	$R_{DS(on)}$	V_{GS} =-10V, I_D =-4A		41	50	mΩ
		V_{GS} =-4.5V, I_D =-3.5A		47	60	mΩ
		V_{GS} =-2.5V,I_D=-2.5A		60	85	mΩ
Forward tranconductance (note 1)	g_{FS}	V_{DS} =-5V, I_D =-5A	7			S
Gate threshold voltage	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =-250μA	-0.7		-1.3	V
Dynamic characteristics (note 3)						
Input capacitance	C_{iss}	V_{DS} =-15V,V_{GS} =0V,f =1MHz		1050		pF
Output capacitance	C_{oss}			127		pF
Reverse transfer capacitance	C_{rss}			85		pF
Switching characteristics (note 3)						
Turn-on delay time	$t_{d(on)}$	V_{GS}=-10V,V_{DS}=-15V, R_L=3.6Ω,R_{GEN}=6Ω			6.5	ns
Turn-on rise time	t_r				3.5	ns
Turn-off delay time	$t_{d(off)}$				40	ns
Turn-off fall Time	t_f				13	ns
Drain-source diode characteristics and maximum ratings						
Diode forward voltage (note 1)	V_{SD}	I_S=-1A,V_{GS}=0V			-1	V

Note :


1. Pulse Test : Pulse width≤300μs, duty cycle≤2%.
2. Device mounted on 1"×1" FR-4 PCB with high coverage 2oz Copper ,double sided.
3. These parameters have no way to verify.

Typical Characteristics


Output Characteristics

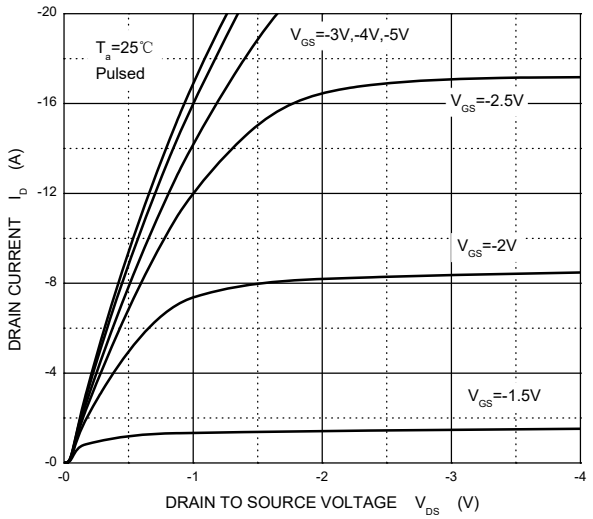


Transfer Characteristics

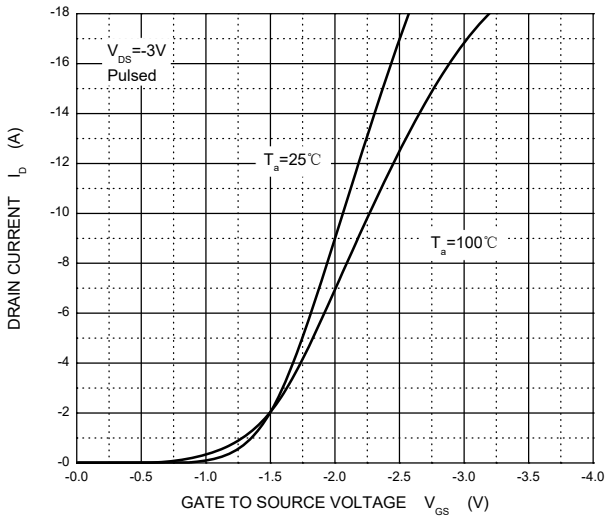


$R_{DS(ON)}$ —— I_D

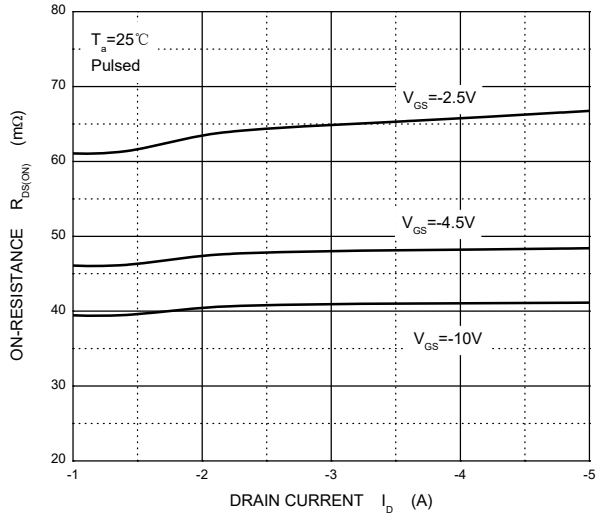


$R_{DS(ON)}$ —— V_{GS}

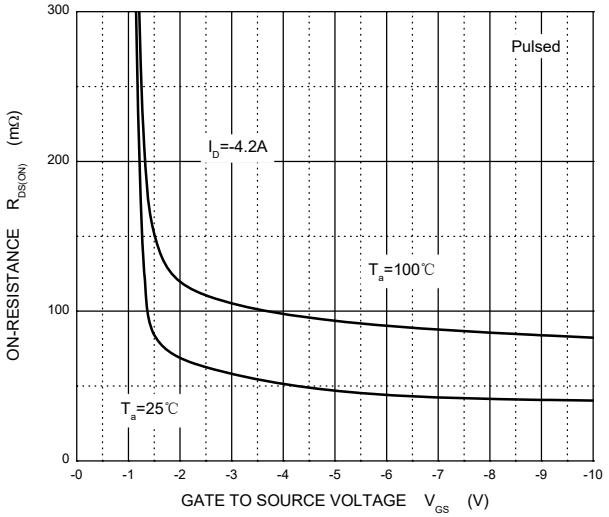


I_S —— V_{SD}

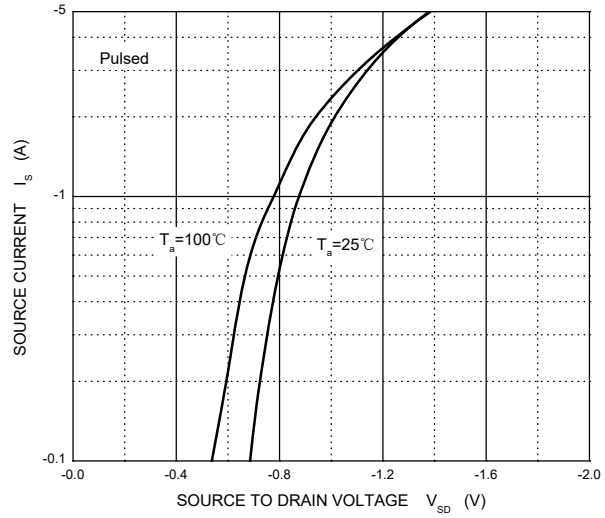



Threshold Voltage

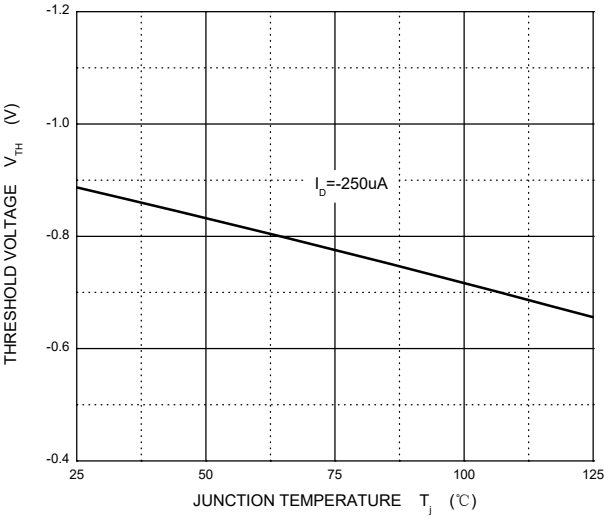

SOT-23-3L Package Outline Dimensions

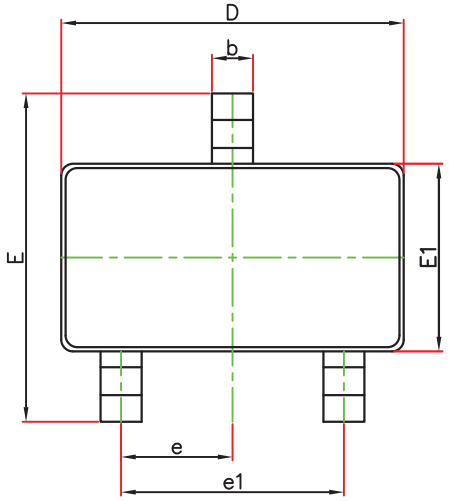


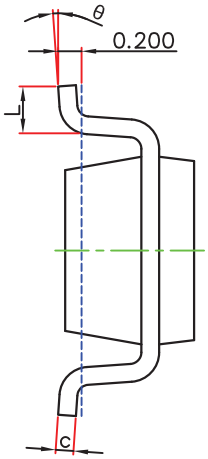

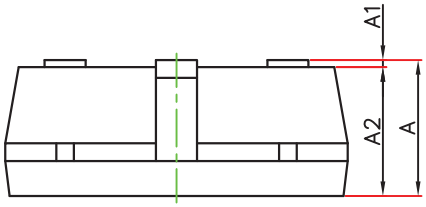

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
K	0°	8°	0°	8°

SOT-23-3L Suggested Pad Layout




Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserves the right to make modifications,enhan nts,improvements,corrections or other es without further notice to any product herein. SZCJ does not assume any liability arising out of the application or use of any product described h

SOT-23-3L Embossed Carrier Tape

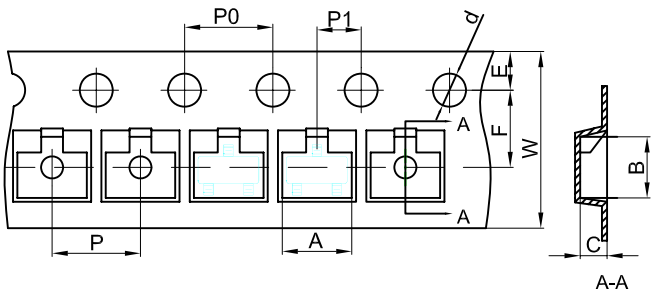


Packaging Description:


SOT-23-3L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 10,000 units per 13" or 33.00 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23-3L	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
(Tolerance)	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+0.3/-0.1

SOT-23-3L Tape Leader and Trailer

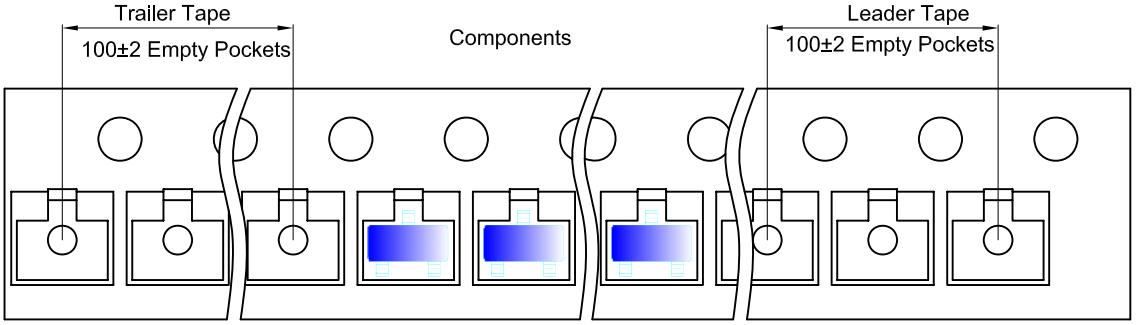

SOT-23-3L Reel

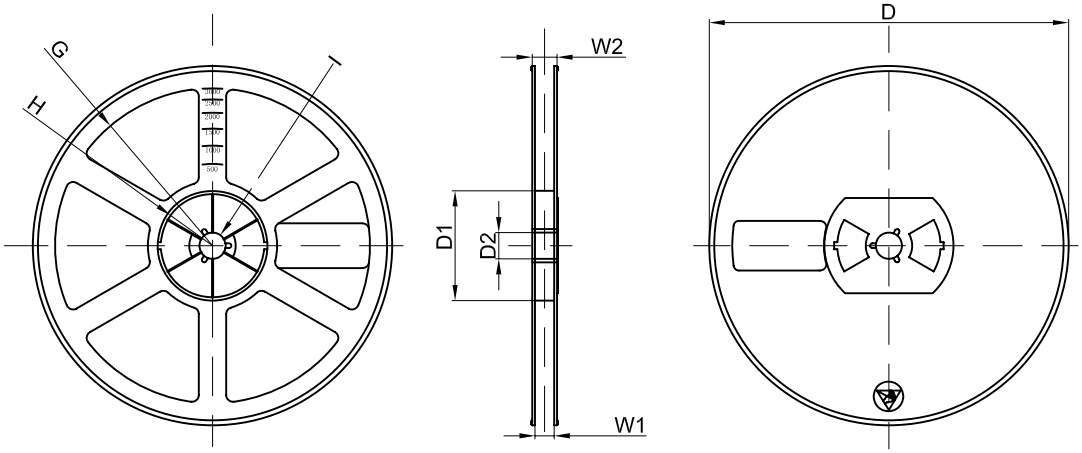

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30
Tolerance	+/-2	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	