SZCJ

Shenzhen Changji Semiconductor Co., LTD.

# KBU Plastic-Encapsulate Bridge Rectifier

## KBU6005 THRU KBU610 General Purpose Bridge Rectifier

### Features

- $I_O$ 6A
- VRRM 50V-1000V
- High surge current capability
- Glass passivated chip


### Applications

- General purpose 1 phase Bridge rectifier applications

### Marking

- KBU6XX

XX：From 005 To 10

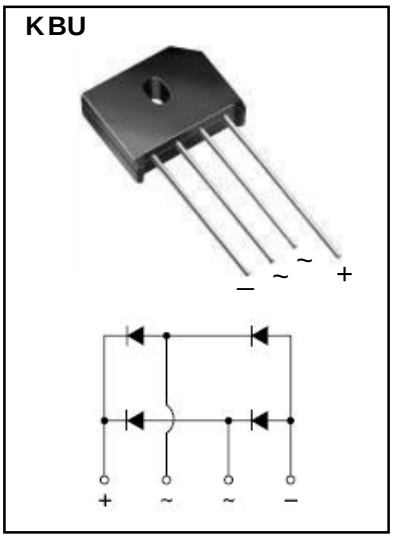


### Limiting Values (Absolute Maximum Rating)

| Item | Symbol | Unit | Conditions | KBU6 | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 005 | 01 | 02 | 04 | 06 | 08 | 10 |
| Repetitive Peak Reverse Voltage | $V_{RRM}$ | V | | 50 | 100 | 200 | 400 | 600 | 800 | 1000 |
| Average Rectified Output Current | $I_O$ | A | 60Hz sine wave, R-load $T_c$ =100℃ | 6 | | | | | | |
| Surge(Non-repetitive)Forward Current | $I_{FSM}$ | A | 60$H_Z$ half-sine wave, 1 cycle, $T_j$=25℃ | 175 | | | | | | |
| Current Squared Time | $I^2t$ | $A^2S$ | 1ms≤t<8.3ms Tj=25℃， Rating of per diode | 127.1 | | | | | | |
| Storage Temperature | $T_{stg}$ | ℃ | | -55 ~+150 | | | | | | |
| Junction Temperature | $T_j$ | ℃ | | -55 ~+150 | | | | | | |

### Electrical Characteristics（$T_a$=25℃ Unless otherwise specified）

| Item | Symbol | Unit | Test Condition | Max |
|---|---|---|---|---|
| Peak Forward Voltage | $V_{FM}$ | V | $I_{FM}$=6.0A, Pulse measurement, Rating of per diode | 1.0 |
| Peak Reverse Current | $I_{RRM}$ | μA | $V_{RM}$=$V_{RRM}$ , Pulse measurement, Rating of per diode | 10 |
| Thermal Resistance | $R_{\theta J-A}$ | ℃/W | Between junction and ambient | 9 |
| | $R_{\theta J-C}$ | | Between junction and case | 5 |

## Typical Characteristics

FIG.1-MAXIMUM FORWARD SURGE CURRENT

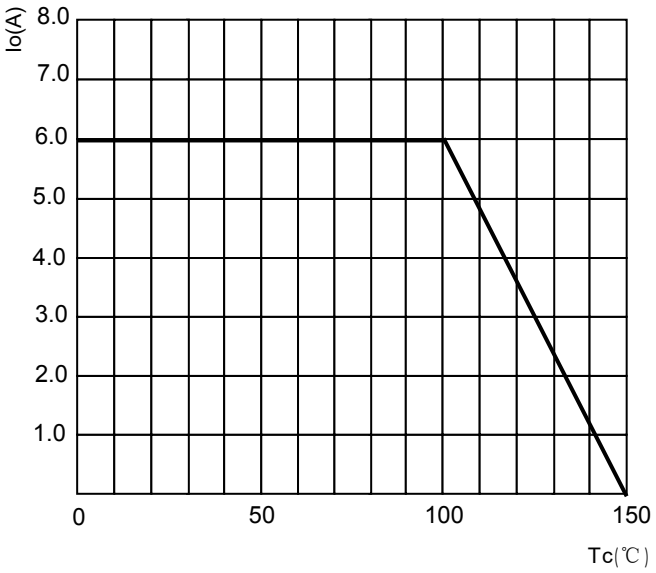



FIG.2-TYPICAL FORWARD CHARACTERISTICS

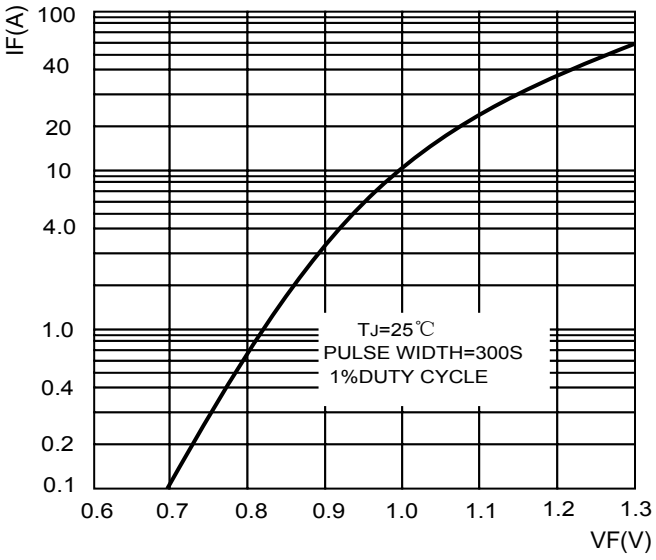



FIG.3-MAXIMUM NON-REPETITIVE SUNRGE CURRENT

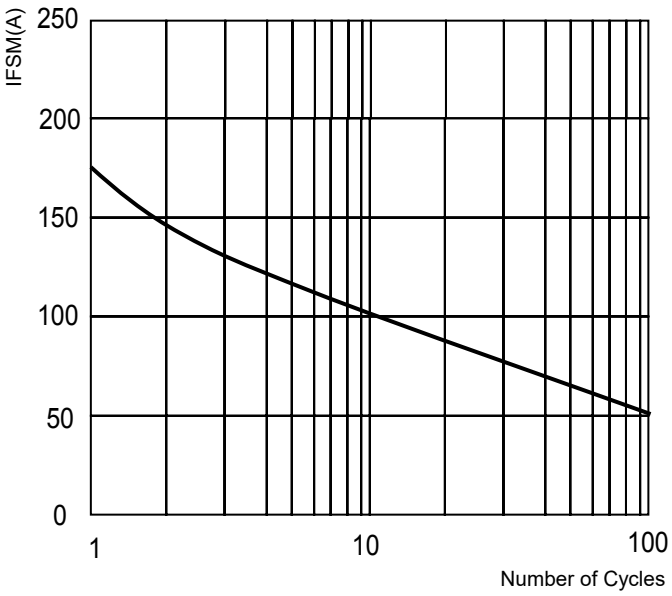



FIG.4-TYPICAL REVERSE CHARACTERISTICS



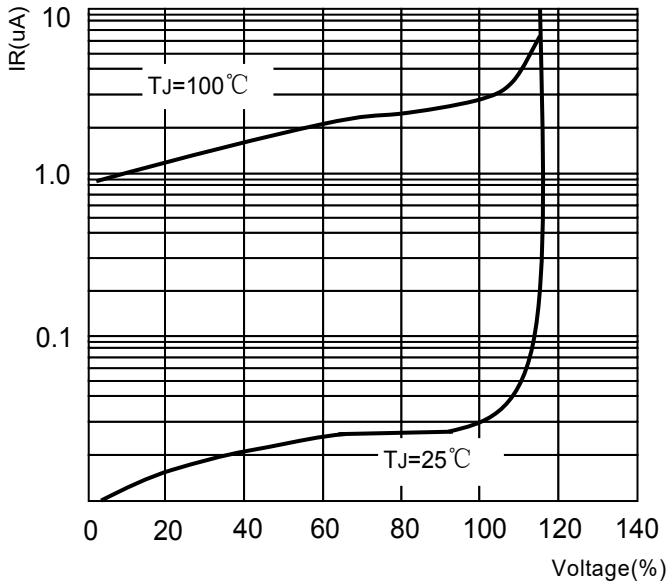



FIG.5-TYPICAL REVERSE CHARACTERISTICS

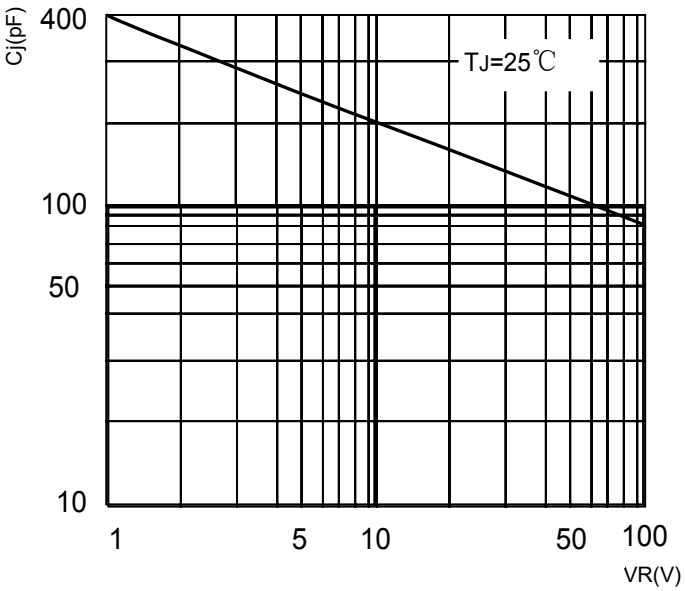

## KBU Package Outline Dimensions

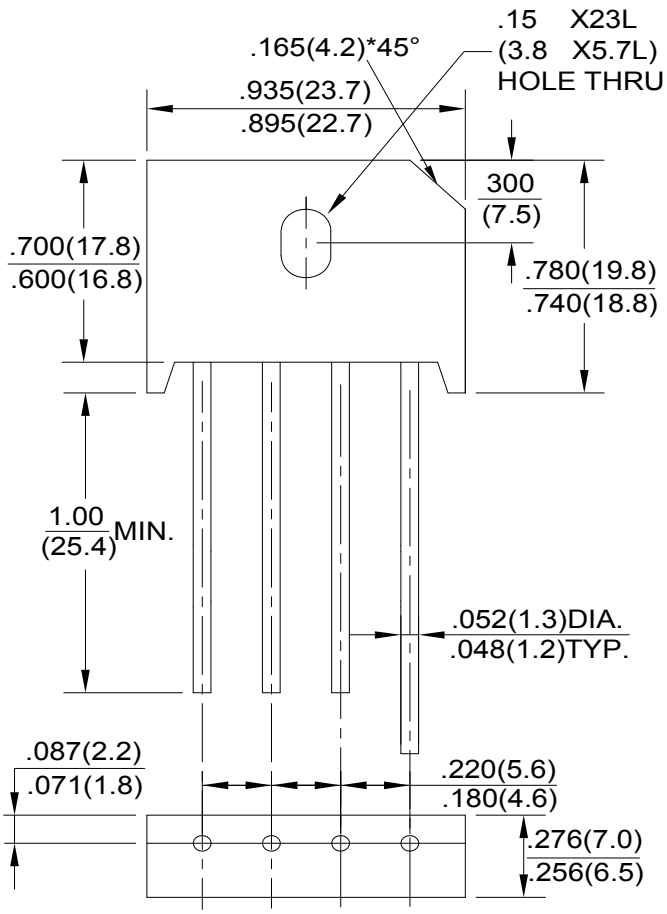


Dimensions in inches and (milimeters)

NOTICE

SZCJ reserves the right to make modifications,enha nts,improvements,corrections or other es without further notice to any product herein.SZCJ does not assume any liability arising out of the application or use of any product described .