
SZCJ Shenzhen Changji Semiconductor Co., LTD.

SOT-563 Plastic-Encapsulate MOSFETS

2N7002V MOSFET (N-Channel)

$V_{(BR)DSS}$	$R_{DS(on)}$MAX	I_D
60 V	5Ω@10V	115mA
	7Ω@5V	



FEATURE

- Dual N-channel MOSFET
- Low on-resistance
- Low gate threshold voltage
- Low input capacitance
- Fast switching speed
- Low input/output leakage


APPLICATION

- Load Switch for Portable Devices
- DC/DC Converter

MARKING



Equivalent Circuit



MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-Source voltage	60	V
V_{GS}	Gate-Source voltage	±20	V
I_D	Drain Current	115	mA
P_D	Power Dissipation	150	mW
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55-150	℃

MOSFET ELECTRICAL CHARACTERISTICS

T_a=25℃ unless otherwise specified


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS}=0 V, I_D=250 μA	60			V
Gate-Threshold Voltage	$V_{th(GS)}$	V_{DS}=V_{GS}, I_D=250 μA	1	1.6	2.5	
Gate-body Leakage	I_{GSS}	V_{DS}=0 V, V_{GS}=±20 V			±80	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60 V, V_{GS}=0 V			80	nA
On-state Drain Current	$I_{D(ON)}$	V_{GS}=10 V, V_{DS}=7 V	500			mA
Drain-Source On-Resistance	$r_{DS(0n)}$	V_{GS}=10 V, I_D=500mA		0.9	5	Ω
		V_{GS}=5 V, I_D=50mA		1.1	7	
Forward Trans conductance	g_{fs}	V_{DS}=10 V, I_D=200mA	80			mS
Drain-source on-voltage	$V_{DS(on)}$	V_{GS}=10V, I_D=500mA			3.75	V
		V_{GS}=5V, I_D=50mA			0.375	V
Diode Forward Voltage	V_{SD}	I_S=115mA, V_{GS}=0 V	0.55		1.2	V
Input Capacitance	C_{iss}	V_{DS}=25V, V_{GS}=0V, f=1MHz			50	pF
Output Capacitance	C_{OSS}				25	
Reverse Transfer Capacitance	C_{rSS}				5	

SWITCHING TIME


Turn-on Time	$t_{d(on)}$	V_{DD}=25 V, R_L=50Ω I_D=500mA,V_{GEN}=10 V R_G=25 Ω			20	ns
Turn-off Time	$t_{d(off)}$				40	

Typical Characteristics


Output Characteristics

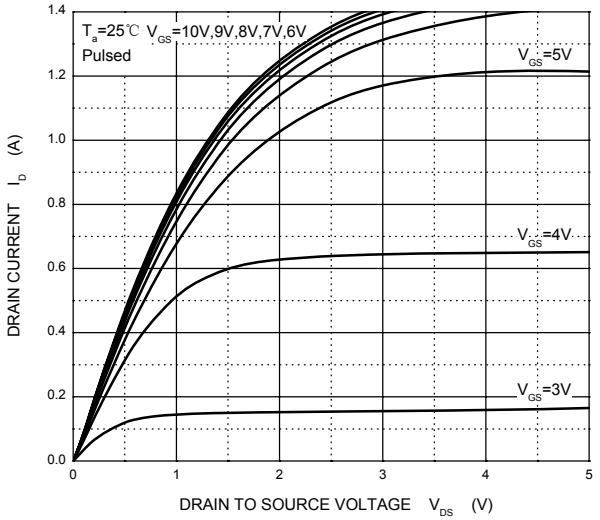


Transfer Characteristics

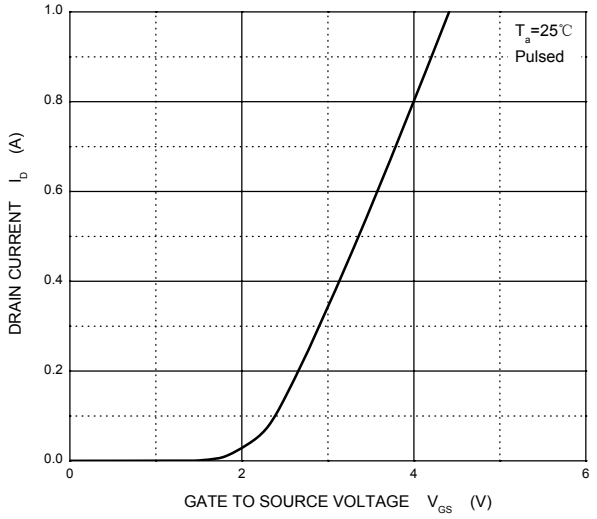


$R_{DS(ON)}$ — I_D

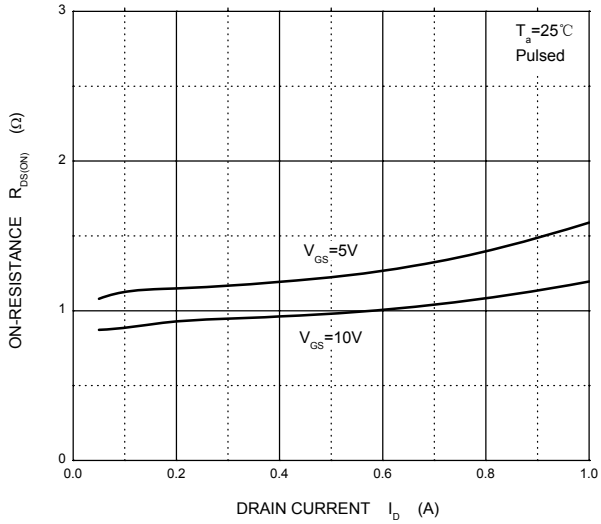


$R_{DS(ON)}$ — V_{GS}

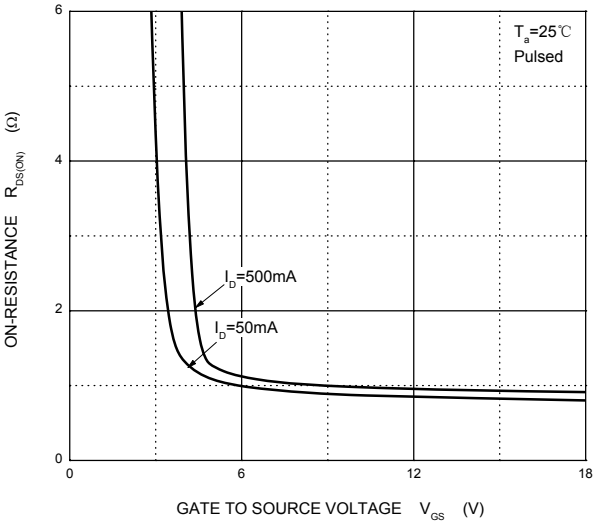

I_S — V_{SD}

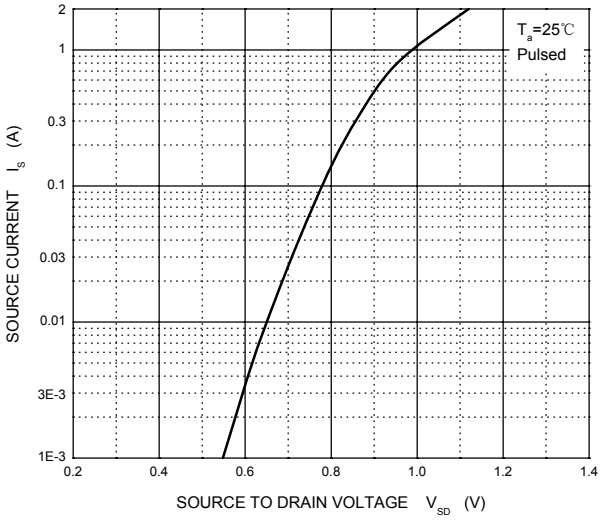


SOT-563 Package Outline Dimensions

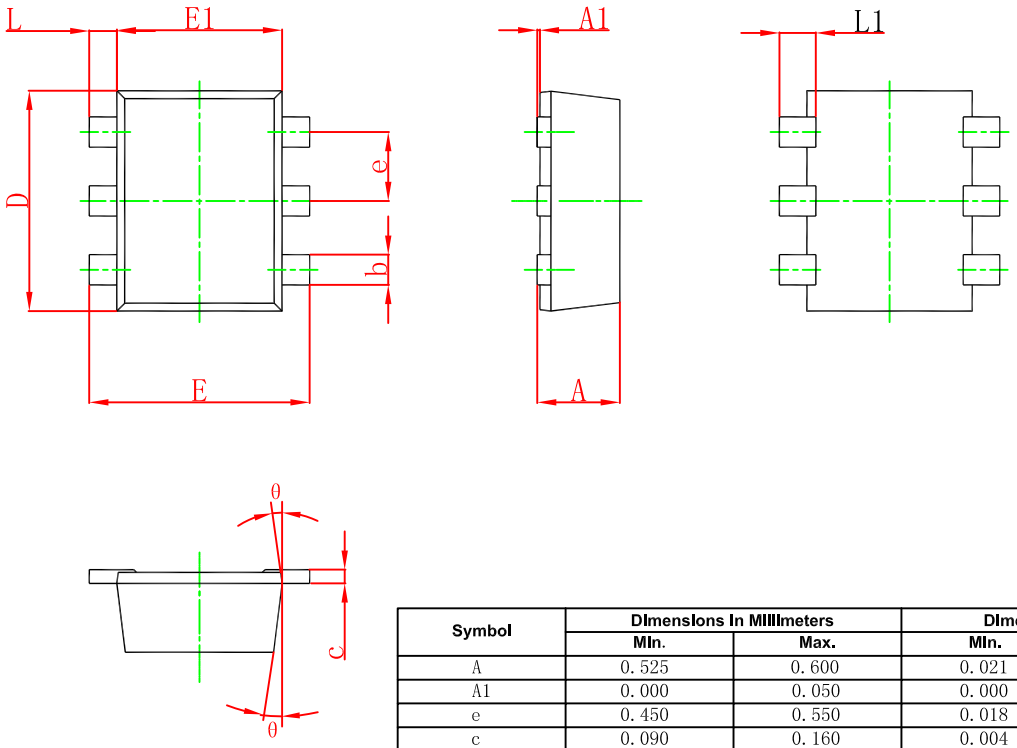

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.525	0.600	0.021	0.024
A1	0.000	0.050	0.000	0.002
e	0.450	0.550	0.018	0.022
c	0.090	0.160	0.004	0.006
D	1.500	1.700	0.059	0.067
b	0.170	0.270	0.007	0.011
E1	1.100	1.300	0.043	0.051
E	1.500	1.700	0.059	0.067
L	0.100	0.300	0.004	0.012
L1	0.200	0.400	0.008	0.016
θ	10° REF.		10° REF.	

SOT-563 Suggested Pad Layout

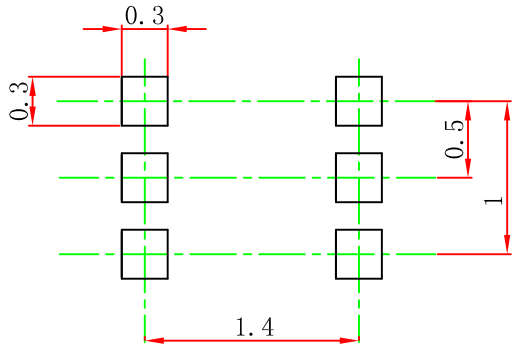


Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserve the right to make modifications,enhan ts,improvements,corrections or other c s without turther notice to any product herein. SZCJ oes not assume any liability arising out of the application or use of any product described .

SOT-563 Tape and reel

SOT-563 Embossed Carrier Tape

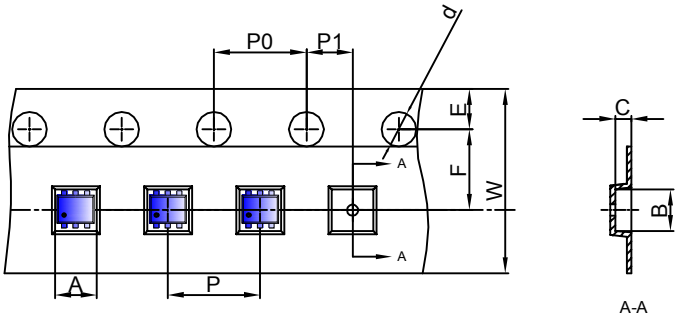


Packaging Description:


SOT-563 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-563	1.78	1.78	0.69	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-563 Tape Leader and Trailer

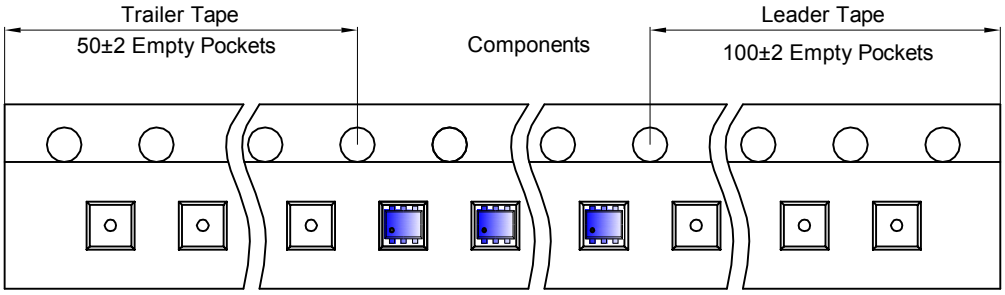

SOT-563 Reel

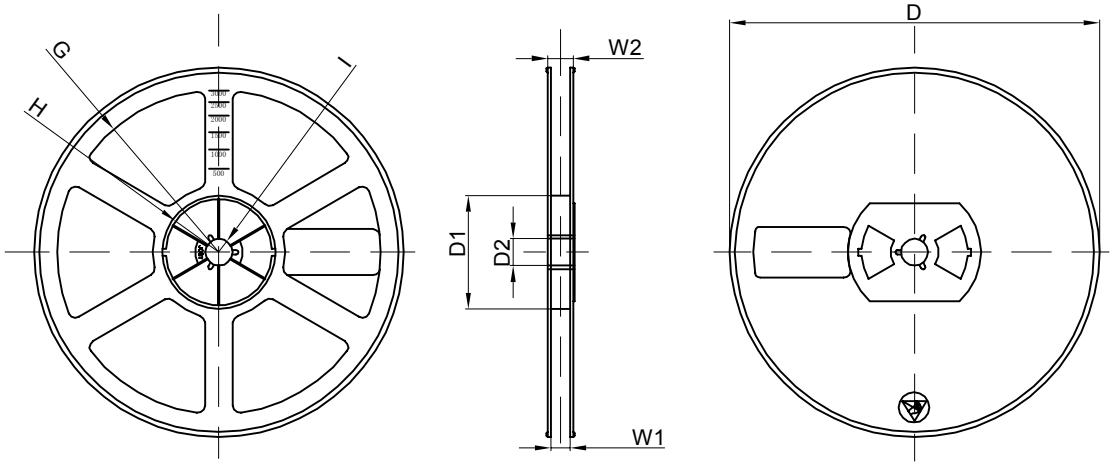

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	