
SZCJ Shenzhen Changji Semiconductor Co., LTD.

SOT-23 Plastic-Encapsulate MOSFETS

BSS138 N-Channel 50-V(D-S) MOSFET

$V_{(BR)DSS}$	$R_{DS(on)}$MAX	I_D
50 V	3.5Ω@10V	220mA
	6Ω@4.5V	

SOT-23



1. GATE
2. SOURCE
3. DRAIN


FEATURE

- High density cell design for extremely low $R_{DS(on)}$
- Rugged and Relaible

APPLICATION

- Direct Logic-Level Interface: TTL/CMOS
- Drivers: Relays, Solenoids, Lamps, Hammers;Display, Memories, Transistors, etc.
- Battery Operated Systems
- Solid-State Relays


MARKING



SS=Device code

Solid dot = Green molding compound device.

Equivalent Circuit



Maximum ratings (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	50	V
Continuous Gate-Source Voltage	V_{GSS}	±20	
Continuous Drain Current	I_D	0.22	A
Pulsed Drain Current (tp=10us)	I_{DM}	0.88	A
Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	357	℃/W
Operation Junction and Storage Temperature Range	T_j,T_{stg}	-55 ~+150	℃

MOSFET ELECTRICAL CHARACTERISTICS

T_a=25℃ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D =250μA	50			V
Gate-body leakage	I_{GSS}	V_{DS} =0V, V_{GS} =±20V			±100	nA
Zero gate voltage drain current	I_{DSS}	V_{DS} =50V, V_{GS} =0V			0.5	μA
		V_{DS} =30V, V_{GS} =0V			100	nA
On characteristics						
Gate-threshold voltage (note 1)	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =1mA	0.80		1.50	V
Static drain-source on-resistance (note 1)	$R_{DS(on)}$	V_{GS} =10V, I_D =0.22A		0.88	3.50	Ω
		V_{GS} =4.5V, I_D =0.22A		1.50	6	
Forward transconductance (note 1)	g_{FS}	V_{DS} =10V, I_D =0.22A	0.12			S
Dynamic characteristics (note 2)						
Input capacitance	C_{iss}	V_{DS} =25V,V_{GS} =0V, f=1MHz		27		pF
Output capacitance	C_{oss}			13		
Reverse transfer capacitance	C_{rss}			6		
Switching characteristics						
Turn-on delay time (note 1,2)	$t_{d(on)}$	V_{DD}=30V, V_{DS}=10V, I_D =0.29A,R_{GEN}=6Ω			5	ns
Rise time (note 1,2)	t_r				18	
Turn-off delay time (note 1,2)	$t_{d(off)}$				36	
Fall time (note 1,2)	t_f				14	
Drain-source body diode characteristics						
Body diode forward voltage (note 1)	V_{SD}	I_S=0.44A, V_{GS} = 0V			1.4	V

Notes:


1. Pulse Test ; Pulse Width ≤300μs, Duty Cycle ≤2%.
2. These parameters have no way to verify.

Typical Characteristics


Output Characteristics

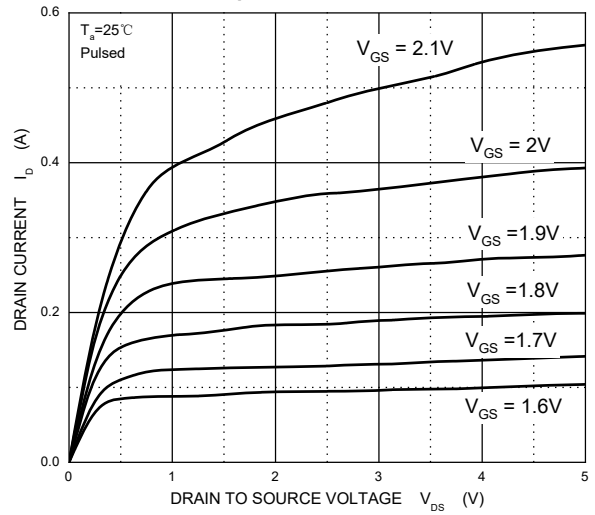


Transfer Characteristics

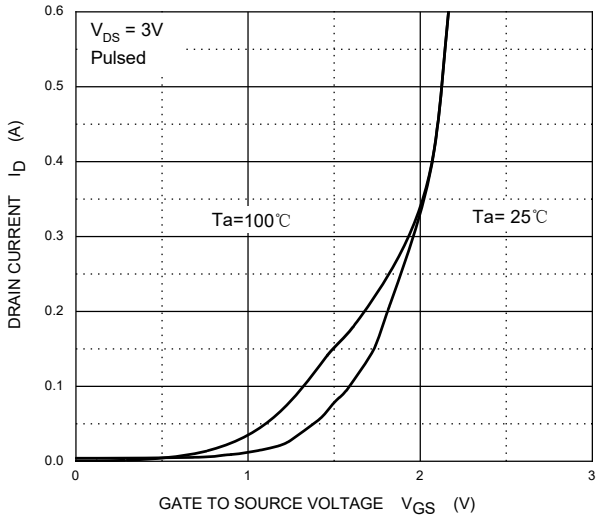


RDS(ON) —— ID

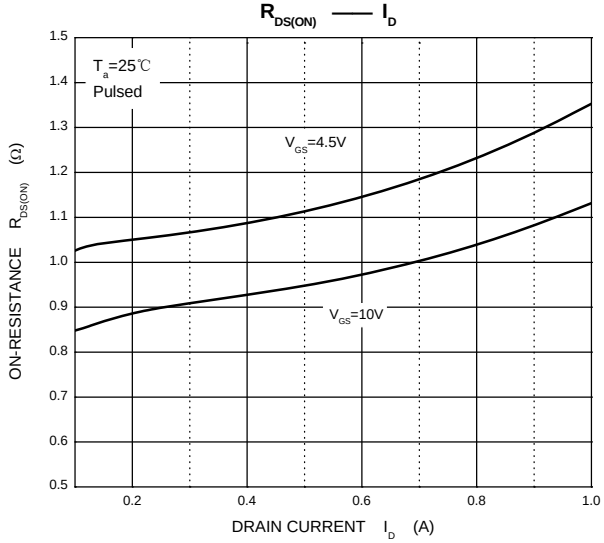


RDS(ON) —— VGS

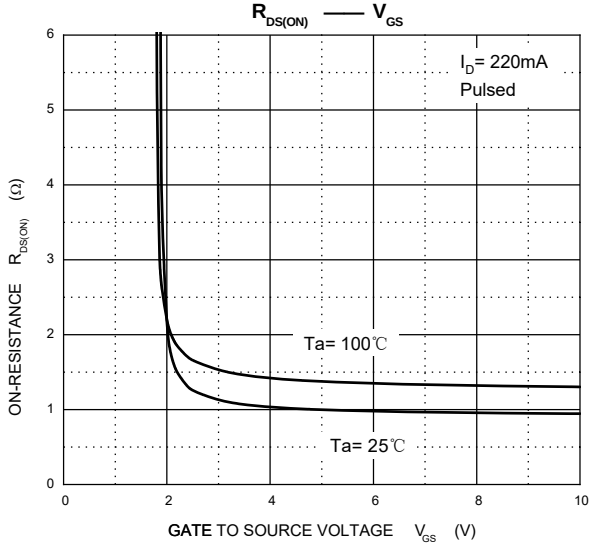

IS —— VSD

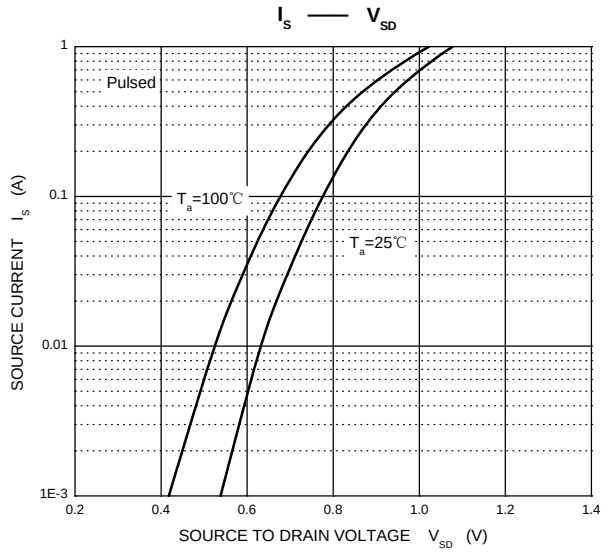


Threshold Voltage

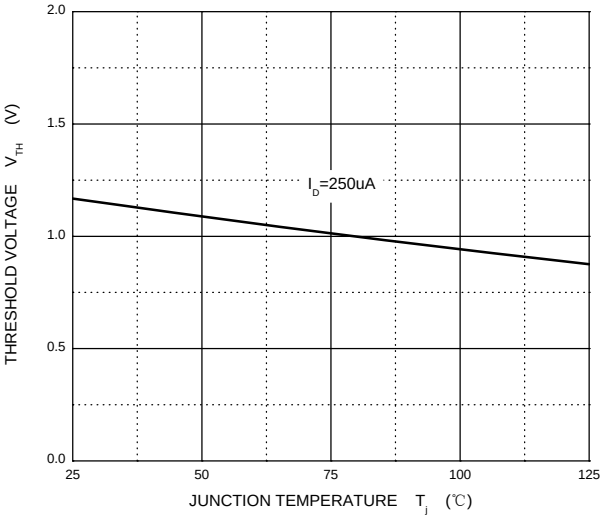


Typical Characteristics


Maximum Safe Operating Area

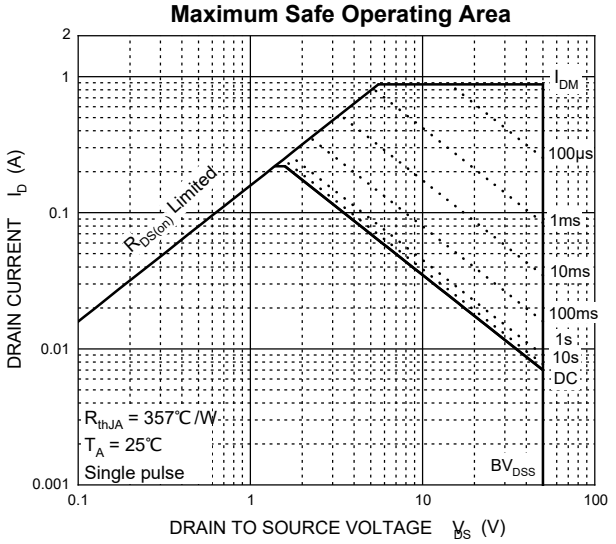



Transient Thermal Impedance, Junction-Ambient

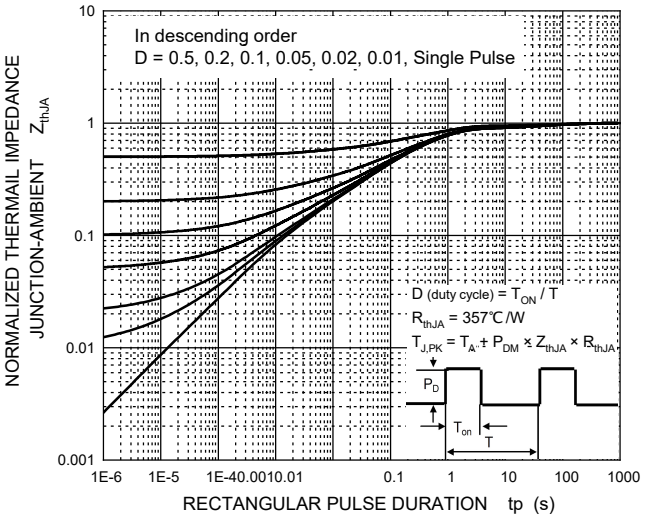

SOT-23 Package Outline Dimensions








Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout




Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserves the right to make modifications,enhan nts,improvements,corrections or other es without further notice to any product herein. SZCJ does not assume any liability arising out of the application or use of any product described h

SOT-23 Tape and Reel

SOT-23 Embossed Carrier Tape

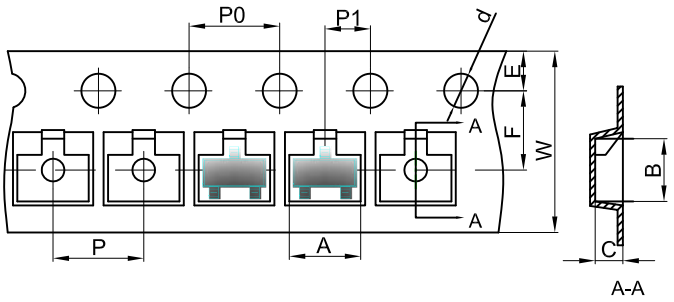


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

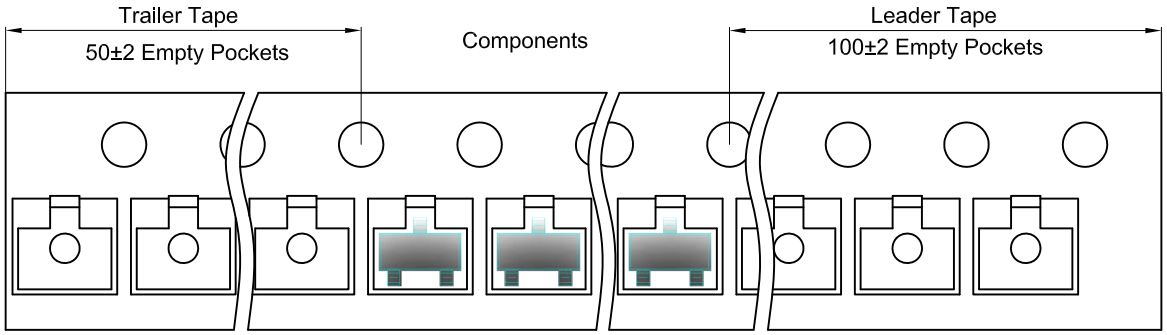

SOT-23 Reel

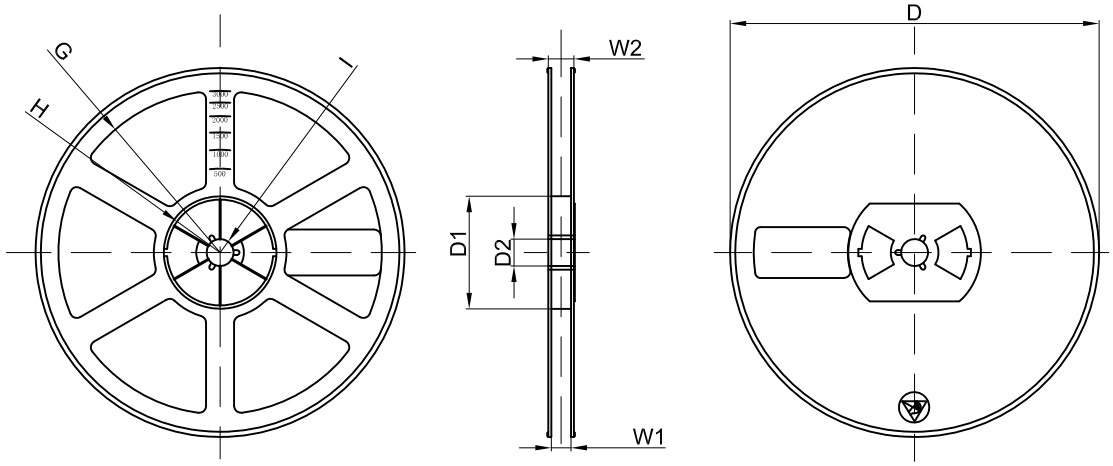

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	